



# LiFePO<sub>4</sub> Battery specification

Model : GMB-36V/10Ah-01

Ver : C/1

Date : 07-07-12

File. No : GMB-WI-04-D015

Approval

Checked

Draft

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |

## **GUANG ZHOU MARKYN BATTERY Co., LTD.**

Unit 2310, B1 Block, Jinri Lise, Dashi Town, Panyu District, Guangzhou City, China

Tel: 86-20-61906348

Fax: 86-20-61906358





Email : [info@gmbattery.net](mailto:info@gmbattery.net)

Website: [www.gmbattery.com](http://www.gmbattery.com)

# 1. SPECIFICATIONS

|  |           |                               |
|--|-----------|-------------------------------|
| Model                                  |           | GMB-36V/10Ah-01               |
| Can Material                           |           | plastic                       |
| Typical Capacity (0.2C <sub>5</sub> A) |           | 10000mAh                      |
| Minimal Capacity (0.2C <sub>5</sub> A) |           | 9800mAh                       |
| Nominal Voltage                        |           | 36V                           |
| Max. Charge Voltage                    |           | 43.8V                         |
| Discharge Cut-off Voltage              |           | 30V                           |
| Max. Charge Current                    |           | 1 C <sub>5</sub> A            |
| Max. Discharge Current                 |           | 2 C <sub>5</sub> A            |
| Inner Cell Dimensions (T*W*L)          |           | 96*82*250mm                   |
| Weight (Approx.)                       |           | 5000.0g                       |
| Impedance (Max, at 1000Hz.)            |           | 200m                          |
| Charge Method<br>(CC/CV)               | Standard  | 0.2 C <sub>5</sub> A × 7.5hrs |
|  | Quick     | 1 C <sub>5</sub> A × 2.5hrs.  |
| Operating Temperature                  | Charge    | 0 ~ 45 ; 32°F ~ 113°F         |
|  | Discharge | -20 ~ 60 ; -4°F ~ 149°F       |
|  | Storage   | -20 ~ 45 ; -4°F ~ 113°F       |

# 2. CHARACTERISTIC CURVES

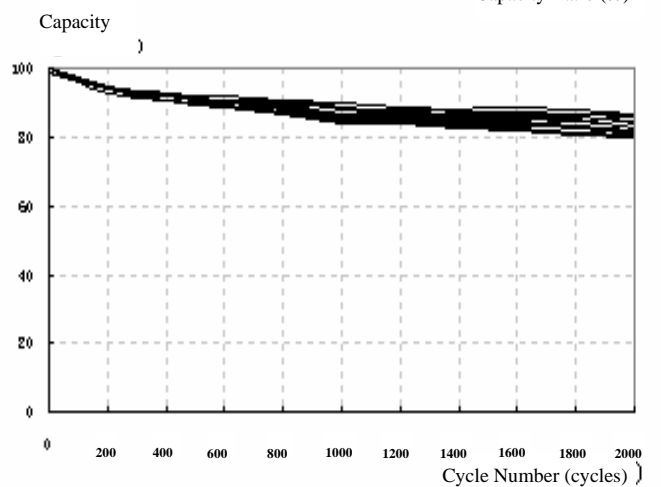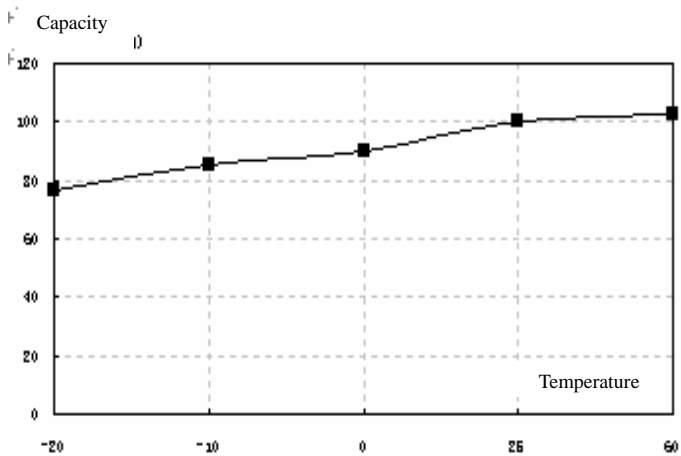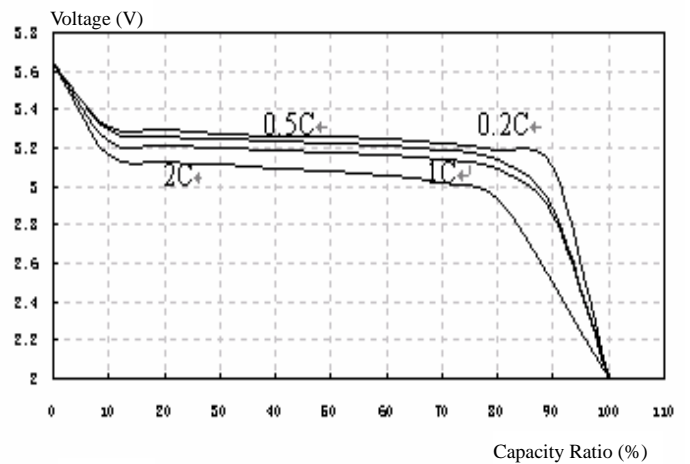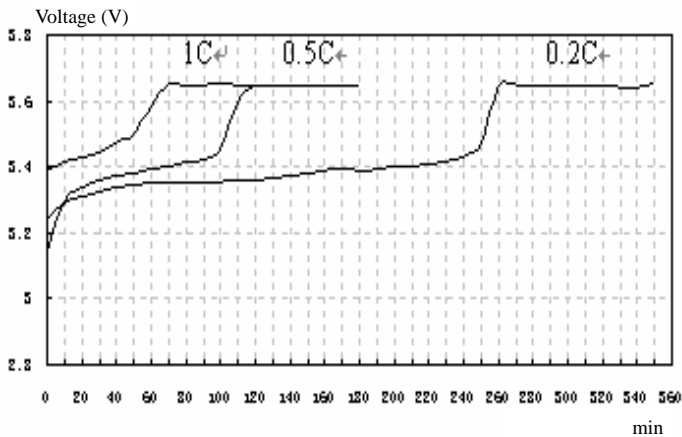

### **3. INDICATIONS ON BATTERY PACK**

The following warnings should be indicated on the battery packs

- Use a specified charger
- Do not throw the battery into fire or heat
- Do not short-circuit the battery terminals
- Do not disassemble the battery

### **4. WARNINGS AND CAUTIONS IN USING THE BATTERY**

To prevent a possibility of the battery from leaking, heating or explosion please observe the following precautions:

#### **WARNINGS!**

- Do not immerse the battery in water or seawater, and keep the battery in a cool dry surrounding if it stands by.
- Do not use or leave the battery near a heat source as fire or heater.
- Use the battery charger specifically for that purpose when recharging.
- Do not reverse the position and negative terminals.
- Do not connect the battery to an electrical outlet.
- Do not discard the battery in fire or a heater.
- Do not short-circuit the battery by directly connecting the positive and negative terminals with metal objects.
- Do not transport or store the battery together with metal objects such as hairpins, necklaces, etc.
- Do not strike, trample or throw the battery.
- Do not directly solder the battery and pierce the battery with a nail or other sharp objects.

#### **CAUTIONS!**

- Do not use or leave the battery at high temperature (for example, at strong direct sunlight or in a vehicle in extremely hot weather). Otherwise, it can overheat or fire or its performance will be degenerate and its service life will be decreased.
- Do not use the battery in a location where static electricity and magnetic field is great, otherwise, the safety devices may be damaged, causing hidden trouble of safety.
- If the battery leaks, and the electrolyte get into the eyes, do not rub the eyes, instead, rinse the eyes with clean water, and immediately seek medical attention. Otherwise, it may injure eyes.
- If the battery gives off an odor, generates heat, becomes discolored or deformed, or in any way appear abnormal during use, recharging or storage, immediately remove it from the device or battery charger and stop using it.
- In case the battery terminals are dirty, clean the terminals with a dry cloth before use. Otherwise performance may occur due to the poor connection with the instrument.
- Be aware discarded batteries may cause fire or explosion, tape the battery terminals to insulate them.

## 5. THE PICTURE OF THE FINISHED PRODUCT



## 6. AMENDMENT OF THIS SPECIFICATION

This specification is subject to change with prior notice.