


## 4 E R 3 4 6 1 5 M - 2

**SPECIFICATION: (23±2°)**

Nominal capacity (20mA ~ 2V):	25.0Ah
Rated voltage:	14.4V
Max constant current of discharge:	3000mA
Max discharge current(pulse):	6000mA
Weight:	980g
Operating temperature range:	-55~85°C

**Discharge characteristics at 23±2°C**

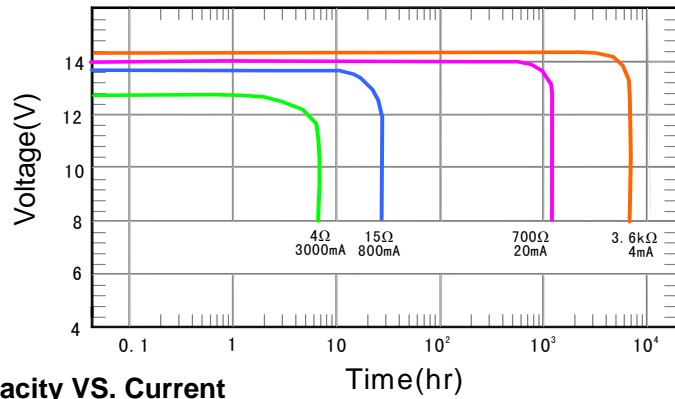

S: Standard termination


**Notes:**

- Dimension: mm
- Special terminations can be made as requested.
- T: Solder tabs
- P: Axial pins


**Important Notes**

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.

**Capacity VS. Current**

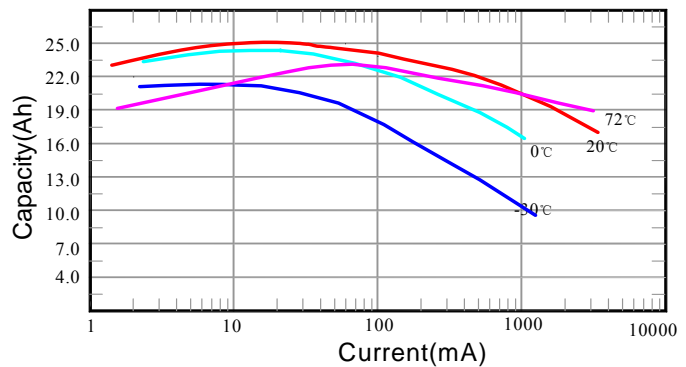

**Voltage VS. Temperature**

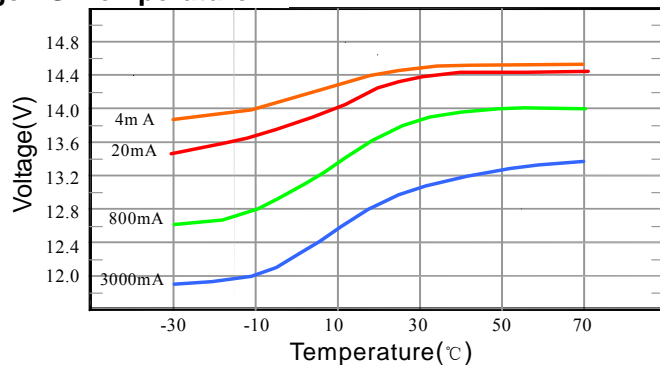

Guangzhou Markyn Battery Co., Ltd.  
 YiJia Industrial Park , Shixin Road 1100 ,Nancun  
 Town,Panyu District, Guangzhou P.R.C  
 Tel:(86)20 — 8456 0852 Fax:(86)20 — 3476 7936  
 Email:sale s@gmbattery.com

U.L. Component Recognition MH 45782