

**LITHIUM BATTERIES**


With soft package(package with plastic tube)

# ER9V 9.0V 1200mAh

lithium-thionyl chloride batteries  
Three ER14250 in series

**Electrical characteristics**

(Stored for one year or less)


◉ Nominal Capacity (0.5mA to 5.4V, at 25°C)	1200mAh
◉ Nominal voltage	9.0V
◉ Max continuous discharge current	35mA
◉ Max. Pulse current Current value is obtaining 5.4V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C	100mA
◉ Storage temperature	20°C ~ 30°C
◉ Operating temperature	-55°C ~ 85°C
◉ Weight(approx)	29g

**WARNING:**

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C, incinerate or expose contents to water.

**Key features**

- High and stable operating voltage
- Low self-discharge rate  
Less than 1% after 1 year of storage at 20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

 UL Component Recognition  
File Number MH 45782


**Main applications**

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks

.....

**LITHIUM BATTERIES**



Typical discharge at 25°C

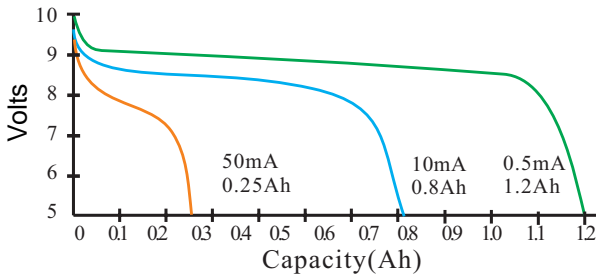

**ER9V**


**lithium-thionyl chloride batteries**  
Three Er14250 in series

Voltage plateau versus Current and Temperature

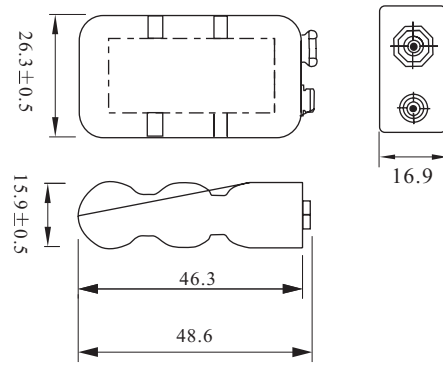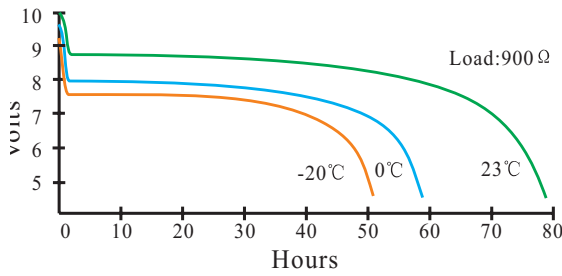

Unit: mm

Typical Continuous Discharge

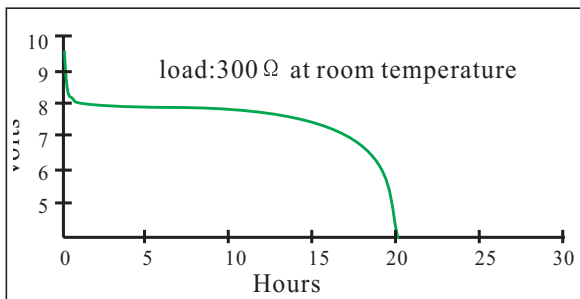

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab