

LITHIUM BATTERIES



Cell size references:CR9 V

CR9V 1000mAh

Three CR14250H in series
lithium-manganese dioxide batteries

Electrical characteristics

(Stored for one year or less)

◉ Nominal Capacity (0.5mA to 5.4V, at 25°C)	1000mAh
◉ Nominal voltage	9.0V
◉ Max continuous discharge current	7mA
◉ Max. Pulse current Current value is obtaining 5.4V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C	70mA
◉ Storage temperature	20°C ~ 30°C
◉ Operating temperature	-40°C ~ 60°C
◉ Weight(approx)	37g

WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C, incinerate or expose contents to water.

Key features

- High and stable operating voltage
- Low self-discharge rate
Less than 1% after 1 year of storage at 20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

UL Component Recognition
File Number MH 45782

Main applications

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks


.....

LITHIUM BATTERIES



CR9V 1000mAh

For high drain/high pulses
lithium manganese dioxide batteries

Typical discharge at 25°C

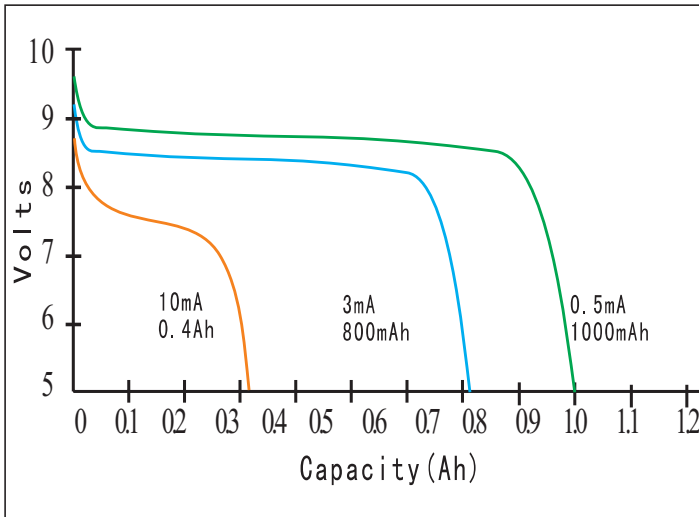

Voltage plateau versus Current and Temperature

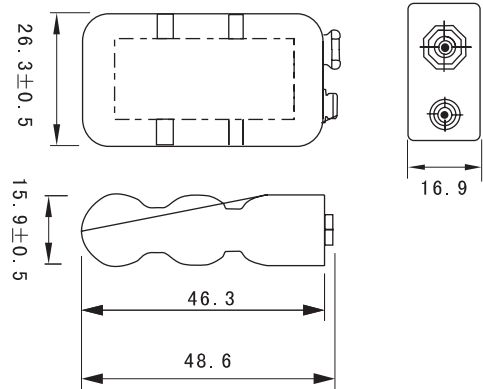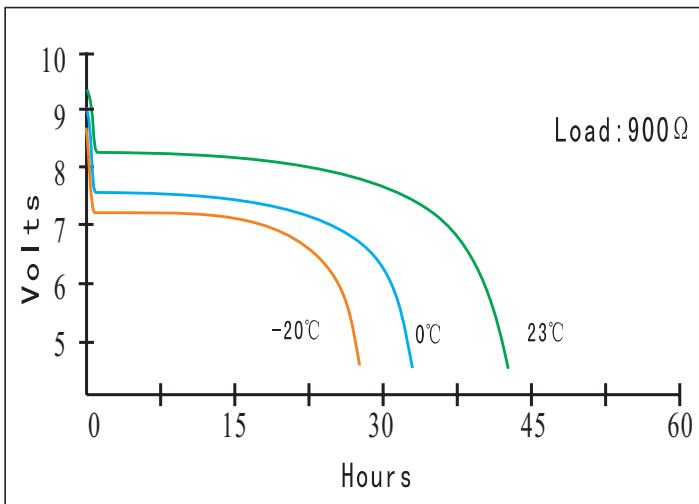

Unit: mm